



2SD1265


NPN EPITAXIAL SILICON TRANSISTOR

POWER AMPLIFIER

VERTICAL DEFLECTION OUTPUT

● ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$)

| Characteristic | Symbol | Rating | Unit |
|--|-----------|---------|------------------|
| Collector-Base Voltage | V_{CB0} | 60 | V |
| Collector-Emitter Voltage | V_{CE0} | 60 | V |
| Emitter-Base voltage | V_{EB0} | 5 | V |
| Collector Current (DC) | I_C | 4 | A |
| Collector Dissipation ($T_c=25^\circ\text{C}$) | P_C | 30 | W |
| Junction Temperature | T_j | 150 | $^\circ\text{C}$ |
| Storage Temperature | T_{stg} | -50~150 | $^\circ\text{C}$ |

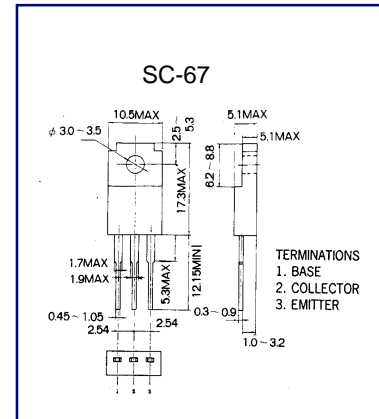

ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$)

| Characteristic | Symbol | Test Condition | Min | Typ | Max | Unit |
|---------------------------------------|---------------|--|-----|-----|-----|---------------|
| Collector Cutoff Current | I_{CBO} | $V_{CB}=150\text{V}, I_E=0$ | | | 10 | μA |
| Emitter Cutoff Current | I_{EBO} | $V_{EB}=5\text{V}, I_C=0$ | | | 10 | μA |
| DC Current Gain | h_{FE1} | $V_{CE}=3.0\text{V}, I_C=-1.0\text{A}$ | 70 | | 240 | |
| Collector- Emitter Saturation Voltage | $V_{CE(sat)}$ | $I_C=3\text{A}, I_B=-0.3\text{mA}$ | | | 1.0 | V |
| Current Gain Bandwidth Product | f_T | $V_{CE}=-10\text{V}, I_C=-0.5\text{A}$ | | 60 | | MHZ |