


## FEATURES

- Industry standard octal-type termination for quick installation.
- Contact rating up to 10A/250VAC

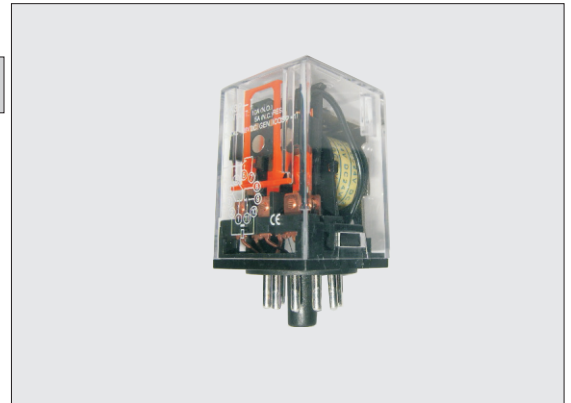

## ORDERING INFORMATION

**MK2PI** — **12** **D**  
           1                  2      3

- |   |   |
|---|---|
| <p>1. Type<br/>         MK2PI (2PDT)<br/>         MK3P5I (3PDT)</p> | <p>3. Coil Nominal Voltage Type<br/>         D: DC<br/>         A: AC</p> |
| <p>2. Coil Nominal Voltage</p>                                      |   |

## COIL DATA(at 25°C)

AC 2.8VA				DC 1.6W				
Coil Nominal Voltage (50/60Hz)	Resistance Tol.±10% (Ohms)	Maximum Pick Up Voltage (V)	Minimum Drop Out Voltage (V)	Coil Nominal Voltage (VDC)	Resistance Tol.±10% (Ohms)	Nominal Current (mA)	Maximum Pick Up Voltage (V)	Minimum Drop Out Voltage (V)
12	18	9.6	3.6	6	22.5	266	4.8	0.6
24	72	19.2	7.2	12	90	133	9.6	1.2
48	288	38.4	14.4	24	360	66	19.2	2.4
110	1,512	88.0	33.0	48	1,440	33	38.4	4.8
220	6,050	176.0	66.0	120	9,000	13	96.0	12.0
240	7,200	192.0	72.0					

## CONTACT RATING

MK2PI (2PDT)	AC 250V/30VDC	10A
MK3P5I(3PDT)	AC 250V/30VDC	10A

## DIMENSIONS(mm)

