High Speed PWM Controller

FEATURES


- Compatible with Voltage or Current Mode Topologies
- Practical Operation Switching Frequencies to 1MHz
- 50ns Propagation Delay to Output
- High Current Dual Totem Pole Outputs (1.5A Peak)
- Wide Bandwidth Error Amplifier
- Fully Latched Logic with Double Pulse Suppression
- Pulse-by-Pulse Current Limiting
- Soft Start / Max. Duty Cycle Control
- Under-Voltage Lockout with Hysteresis
- Low Start Up Current (1.1mA)

DESCRIPTION

The UC1825 family of PWM control ICs is optimized for high frequency switched mode power supply applications. Particular care was given to minimizing propagation delays through the comparators and logic circuitry while maximizing bandwidth and slew rate of the error amplifier. This controller is designed for use in either current-mode or voltage mode systems with the capability for input voltage feed-forward.

Protection circuitry includes a current limit comparator with a 1V threshold, a TTL compatible shutdown port, and a soft start pin which will double as a maximum duty cycle clamp. The logic is fully latched to provide jitter free operation and prohibit multiple pulses at an output. An under-voltage lockout section with 800mV of hysteresis assures low start up current. During under-voltage lockout, the outputs are high impedance.

These devices feature totem pole outputs designed to source and sink high peak currents from capacitive loads, such as the gate of a power MOSFET. The on state is designed as a high level.

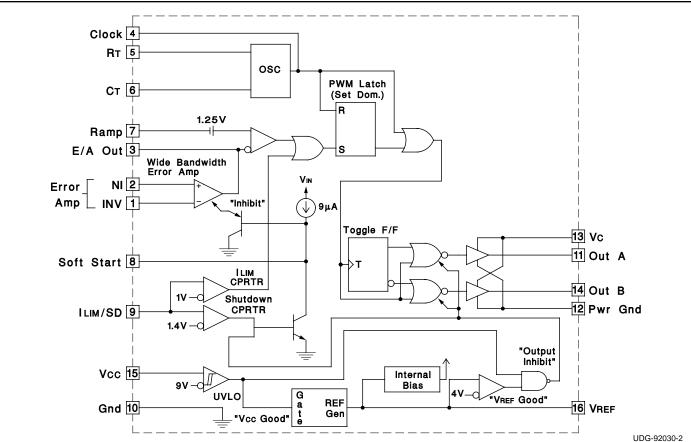

BLOCK DIAGRAM

ABSOLUTE MAXIMUM		CONNECTION DIAGRA	MS	UC382
Supply Voltage (Pins 13, 15) Output Current, Source or Sink (DC Pulse (0.5 s)	(Pins 11, 14)	DIL-16 (Top View) J or N Package	$\overline{}$	
Analog Inputs		INV 1	16 VREF 5.1V	
(Pins 1, 2, 7)		NI 2	15 Vcc	
(Pin 8, 9)		E/A Out 3	14 Out B	
Error Amplifier Output Current (Pin 4)		Clock 4	13 Vc	
Soft Start Sink Current (Pin 8) .				
Oscillator Charging Current (Pin		RT 5	12 Pwr Gnd	
Power Dissipation		Ст 6	11 Out A	
Storage Temperature Range		Ramp 7	10 Gnd	
Lead Temperature (Soldering, 1		Soft Start 8	9 ILIM/SD	
Note 1: All voltages are with res				
rents are positive into, negative o	out of part; pin numbers refer to			
DIL-16 package.	ted Circuit Databook for thermal		PACKAGE PIN FU	INCTION
imitations and considerations of		PLCC-20 & LCC-20	FUNCTION	PIN
initiatione and conclusionations of	paoliago.			
		(Top View)	N/C	1
SOIC-16 (Top View)		,	INV	2
SOIC-16 (Top View) DW Package		(Top View) Q & L Packages	INV NI	2 3
SOIC-16 (Top View) DW Package		,	INV NI E/A Out	2 3 4
		,	INV NI E/A Out Clock	2 3 4 5
DW Package		Q & L Packages	INV NI E/A Out Clock N/C	2 3 4 5 6
	16 VREF5.1V	,	INV NI E/A Out Clock N/C RT	2 3 4 5 6 7
DW Package	16 VREF5.1V 16 Vcc	Q & L Packages	INV NI E/A Out Clock N/C	2 3 4 5 6
	16 VREF5.1V	Q & L Packages	INV NI E/A Out Clock N/C RT CT	2 3 4 5 6 7 8
DW Package	16) VREF5.1V 15) Vcc 14) Out B	Q & L Packages 3 2 1 20 19 4 18 5 17	INV NI E/A Out Clock N/C RT CT Ramp	2 3 4 5 6 7 8 9
DW Package INV1 NI2 E/A Out3 Clock4	16 VREF5.1V 15 Vcc 14 Out B 13 Vc	Q & L Packages 3 2 1 20 19 4 18 5 17 6 16	INV NI E/A Out Clock N/C RT CT Ramp Soft Start N/C ILIM/SD	2 3 4 5 6 7 8 9 10 11 12
DW Package	16) VREF5.1V 15) Vcc 14) Out B 13) Vc 12) Pwr Gnd	Q & L Packages 3 2 1 20 19 4 18 5 17 6 16 7 15	INV NI E/A Out Clock N/C RT CT Ramp Soft Start N/C ILIM/SD Gnd	2 3 4 5 6 7 8 9 10 11 12 13
DW Package INV1 NI2 E/A Out3 Clock4	16 VREF5.1V 15 Vcc 14 Out B 13 Vc	Q & L Packages 3 2 1 20 19 4 18 5 17 6 16 7 15 8 14	INV NI E/A Out Clock N/C RT CT Ramp Soft Start N/C ILIM/SD Gnd Out A	2 3 4 5 6 7 8 9 10 11 12 13 14
DW Package	16) VREF5.1V 15) Vcc 14) Out B 13) Vc 12) Pwr Gnd	Q & L Packages 3 2 1 20 19 4 18 5 17 6 16 7 15	INV NI E/A Out Clock N/C RT CT Ramp Soft Start N/C ILIM/SD Gnd Out A Pwr Gnd	2 3 4 5 6 7 8 9 10 11 12 13 14 15
DW Package INV1 NI2 E/A Out3 Clock4 RT5 CT6 Ramp7	16) VREF5.1V 15) Vcc 14) Out B 13) Vc 12) Pwr Gnd 11) Out A	Q & L Packages 3 2 1 20 19 4 18 5 17 6 16 7 15 8 14	INV NI E/A Out Clock N/C RT CT Ramp Soft Start N/C ILIM/SD Gnd Out A Pwr Gnd N/C	$ \begin{array}{c} 2\\ 3\\ 4\\ 5\\ 6\\ 7\\ 8\\ 9\\ 10\\ 11\\ 12\\ 13\\ 14\\ 15\\ 16\\ \end{array} $
DW Package INV1 NI2 E/A Out3 Clock4 RT5 CT6	16) VREF5.1V 15) Vcc 14) Out B 13) Vc 12) Pwr Gnd 11) Out A 10) Gnd	Q & L Packages 3 2 1 20 19 4 18 5 17 6 16 7 15 8 14	INV NI E/A Out Clock N/C RT CT Ramp Soft Start N/C ILIM/SD Gnd Out A Pwr Gnd N/C Vc	$ \begin{array}{c} 2\\ 3\\ 4\\ 5\\ 6\\ 7\\ 8\\ 9\\ 10\\ 11\\ 12\\ 13\\ 14\\ 15\\ 16\\ 17\\ \end{array} $
DW Package INV1 NI2 E/A Out3 Clock4 RT5 CT6 Ramp7	16) VREF5.1V 15) Vcc 14) Out B 13) Vc 12) Pwr Gnd 11) Out A 10) Gnd	Q & L Packages 3 2 1 20 19 4 18 5 17 6 16 7 15 8 14	INV NI E/A Out Clock N/C RT CT Ramp Soft Start N/C ILIM/SD Gnd Out A Pwr Gnd N/C	$ \begin{array}{c} 2\\ 3\\ 4\\ 5\\ 6\\ 7\\ 8\\ 9\\ 10\\ 11\\ 12\\ 13\\ 14\\ 15\\ 16\\ \end{array} $

THERMAL RATINGS TABLE

Package	ΘJA	ΘJC
DIL-16J	80-120	28 ⁽²⁾
DIL-16N	90 ⁽¹⁾	45
PLCC-20	43-75(1)	34
LCC-20	70-80	20 ⁽²⁾
SOIC-16	50-120 ⁽¹⁾	35

(1) Specified Θ_{JA} (junction to ambient) is for devices mounted to $5in^2$ FR4 PC board with one ounce copper where noted. When resistance range is given, lower values are for $5in^2$ aluminum PC board. Test PWB was 0.062in thick and typically used 0.635mm trace widths for power packages and 1.3mm trace widths for non-power packages with 100 x 100 mil probe land area at the end of each trace.

(2) Θ_{JC} data values stated were derived from MIL-STD-1835B. MIL-STD-1835B states that the baseline values shown are worst case (mean +2s) for a 60 x 60mil microcircuit device silicon die and applicable for devices with die sizes up to 14400 square mils. For device die sizes greater than 14400 square mils use the following values; dual-in-line, 11°C/W; flat pack 10°C/W; pin grid array, 10°C/W.

PARAMETERS	TEST CONDITIONS		UC1825 UC2825				UC3825			
		MIN	TOP	MAX	MIN	TOP	MAX	UNITS		
Reference Section										
Output Voltage	$To = 25^{\circ}C$, $Io = 1mA$	5.05	5.10	5.15	5.00	5.10	5.20	V		
Line Regulation	10V < Vcc < 30V		2	20		2	20	mV		
Load Regulation	1mA < IO < 10mA		5	20		5	20	mV		
Temperature Stability*	TMIN < TA < TMAX		0.2	0.4		0.2	0.4	mV/°C		
Total Output Variation*	Line, Load, Temperature	5.00		5.20	4.95		5.25	V		
Output Noise Voltage*	10Hz < f < 10kHz		50			50		μV		
Long Term Stability*	T _J = 125°C, 1000hrs.		5	25		5	25	mV		
Short Circuit Current	VREF = 0V	-15	-50	-100	-15	-50	-100	mA		
Oscillator Section					•			•		
Initial Accuracy*	T _J = 2°C	360	400	440	360	400	440	kHz		
Voltage Stability*	10V < Vcc < 30V		0.2	2		0.2	2	%		
Temperature Stability*	TMIN < TA < TMAX		5			5		%		
Total Variation*	Line, Temperature	340		460	340		460	kHz		
Oscillator Section (cont.)	· ·	•			•			•		
Clock Out High		3.9	4.5		3.9	4.5		V		
Clock Out Low			2.3	2.9		2.3	2.9	V		
Ramp Peak*		2.6	2.8	3.0	2.6	2.8	3.0	V		
Ramp Valley*		0.7	1.0	1.25	0.7	1.0	1.25	V		
Ramp Valley to Peak*		1.6	1.8	2.0	1.6	1.8	2.0	V		
Error Amplifier Section		•	1							
Input Offset Voltage				10			15	mV		
Input Bias Current			0.6	3		0.6	3	μA		
Input Offset Current			0.1	1		0.1	1	μΑ		
Open Loop Gain	1V < V0 < 4V	60	95		60	95		dB		
CMRR	1.5V < Vсм < 5.5V	75	95		75	95		dB		
PSRR	10V < Vcc < 30V	85	110		85	110		dB		
Output Sink Current	VPIN 3 = 1V	1	2.5		1	2.5		mA		
Output Source Current	VPIN 3 = 4V	-0.5	-1.3		-0.5	-1.3		mA		
Output High Voltage	IPIN 3 = -0.5mA	4.0	4.7	5.0	4.0	4.7	5.0	V		
Output Low Voltage	IPIN 3 = 1mA	0	0.5	1.0	0	0.5	1.0	V		
Unity Gain Bandwidth*		3	5.5		3	5.5		MHz		
Slew Rate*		6	12		6	12		V/µs		

ELECTRICAL CHARACTERISTICS: Unless otherwise stated, these specifications apply for , RT = 3.65k, CT = 1nF, Vcc = 15V, -55°C<Ta<125°C for the UC1825, -40°C<Ta<85°C for the UC2825, and 0°C<Ta<70°C for the UC3825, Ta=To.

PARAMETERS	TEST CONDITIONS		UC1825 UC2825					
		MIN	TOP	MAX	MIN	TOP	MAX	UNITS
PWM Comparator Section								
Pin 7 Bias Current	VPIN 7 = 0V		-1	-5		-1	-5	μA
Duty Cycle Range		0		80	0		85	%
Pin 3 Zero DC Threshold	VPIN 7 = 0V	1.1	1.25		1.1	1.25		V
Delay to Output*			50	80		50	80	ns
Soft-Start Section								
Charge Current	VPIN 8 = 0.5V	3	9	20	3	9	20	μA
Discharge Current	VPIN 8 = 1V	1			1			mA
Current Limit / Shutdown S	ection							
Pin 9 Bias Current	0 < VPIN 9 < 4V			15			10	μA
Current Limit Threshold		0.9	1.0	1.1	0.9	1.0	1.1	V
Shutdown Threshold		1.25	1.40	1.55	1.25	1.40	1.55	V
Delay to Output			50	80		50	80	ns
Output Section					•			-
Output Low Level	IOUT = 20mA		0.25	0.40		0.25	0.40	V
	IOUT = 200mA		1.2	2.2		1.2	2.2	V
Output High Level	IOUT = -20mA	13.0	13.5		13.0	13.5		V
	IOUT = -200mA	12.0	13.0		12.0	13.0		V
Collector Leakage	Vc = 30V		100	500		10	500	μA
Rise/Fall Time*	CL = 1nF		30	60		30	60	ns
Under-Voltage Lockout Sec	tion							-
Start Threshold		8.8	9.2	9.6	8.8	9.2	9.6	V
UVLO Hysteresis		0.4	0.8	1.2	0.4	0.8	1.2	V
Supply Current Section		_			-			-
Start Up Current	Vcc = 8V		1.1	2.5		1.1	2.5	mA
ICC	VPIN 1, VPIN 7, VPIN 9 = 0V; VPIN 2 = 1V		22	33		22	33	mA

ELECTRICAL CHARACTERISTICS: Unless otherwise stated, these specifications apply for , RT = 3.65k, CT = 1nF, Vcc = 15V, -55°C<Ta<125°C for the UC1825, -40°C<Ta<85°C for the UC2825, and 0°C<Ta<70°C for the UC3825, Ta=TJ.

* This parameter not 100% tested in production but guaranteed by design.


Printed Circuit Board Layout Considerations

UC1825 UC2825 UC3825


High speed circuits demand careful attention to layout and component placement. To assure proper performance of the UC1825 follow these rules: 1) Use a ground plane. 2) Damp or clamp parasitic inductive kick energy from the gate of driven MOSFETs. Do not allow the output pins to ring below ground. A series gate resistor or a shunt 1 Amp Schottky diode at the output pin will serve

this purpose. 3) Bypass Vcc, Vc, and VREF. Use 0.1μ F monolithic ceramic capacitors with low equivalent series inductance. Allow less than 1 cm of total lead length for each capacitor between the bypassed pin and the ground plane. 4) Treat the timing capacitor, CT, like a bypass capacitor.

Error Amplifier Circuit

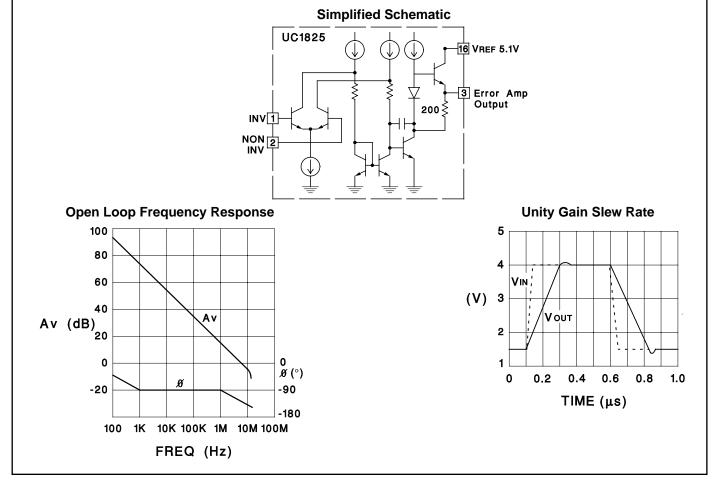


PWM Applications

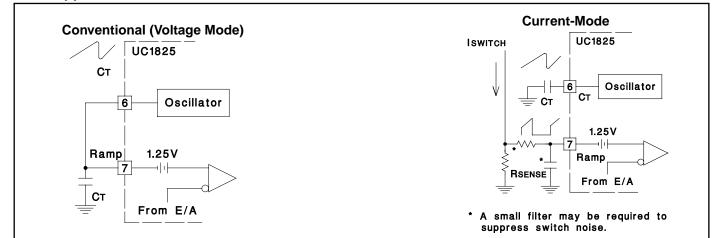


Oscillator Circuit

UC1825 UC2825 UC3825

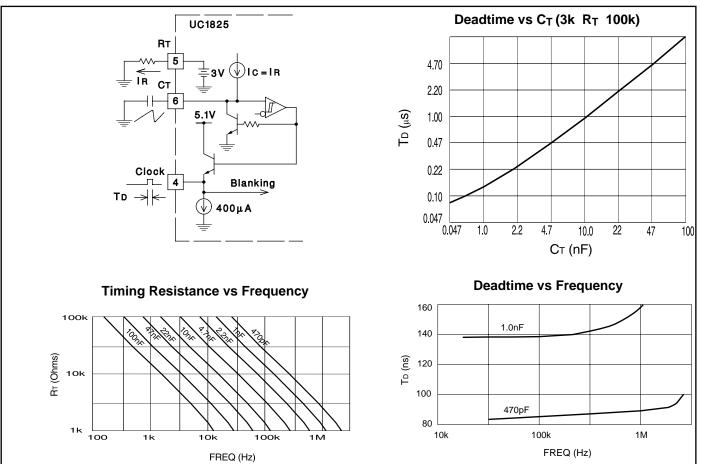


Synchronized Operation

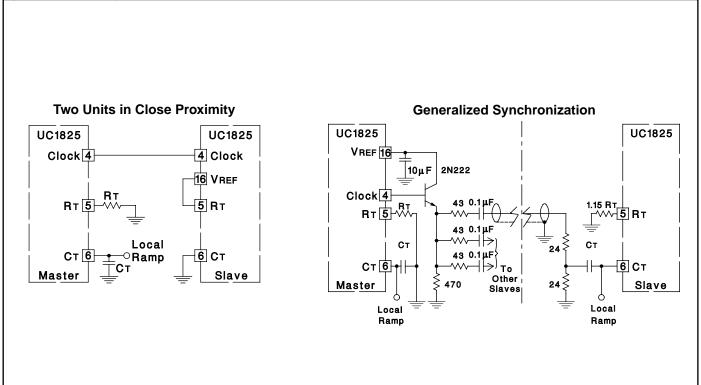


UC1825 UC2825 UC3825

Forward Technique for Off-Line Voltage Mode Application

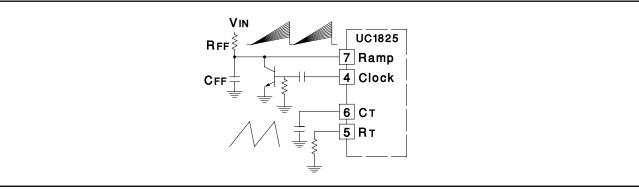


Constant Volt-Second Clamp Circuit


The circuit shown here will achieve a constant volt-second product clamp over varying input voltages. The ramp generator components, RT and CR are chosen so that the ramp at Pin 9 crosses the 1V threshold at the same time the desired maximum volt-second product is reached. The delay through the functional nor block must be such that the ramp capacitor can be completely discharged during the minimum deadtime.

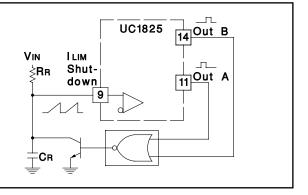


Output Section

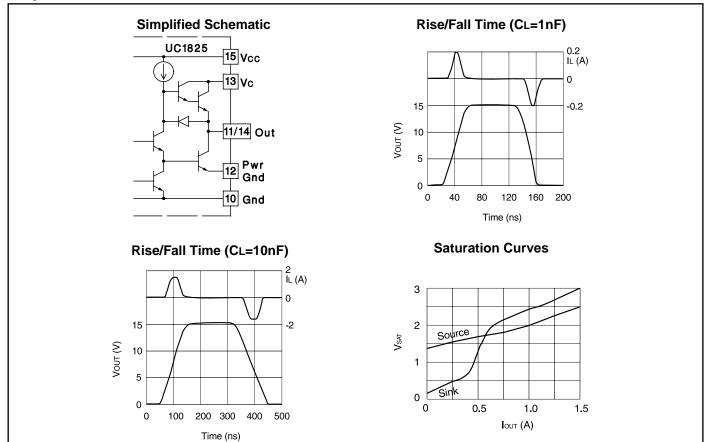

Open Loop Laboratory Test Fixture

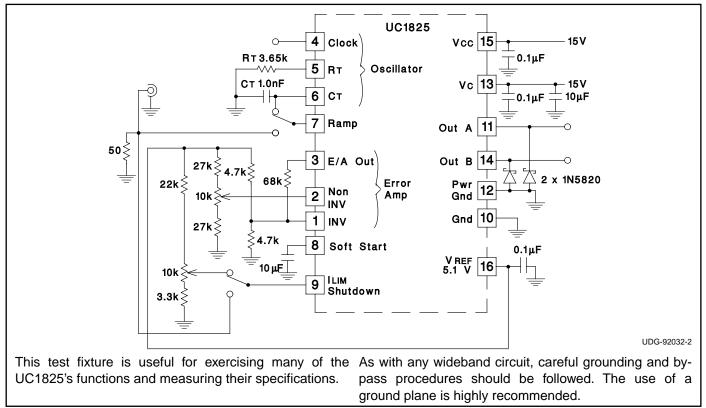

Design Example: 50W, 48V to 5V DC to DC Converter - 1.5MHz Clock Frequency

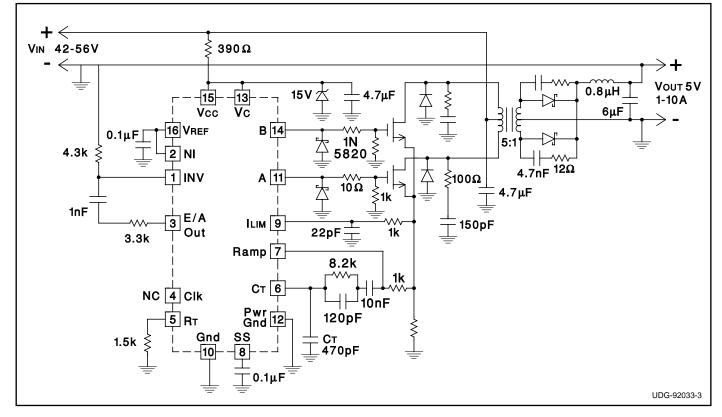

www.ti.com

29-Oct-2009

PACKAGING INFORMATION

Orderable Device	Status ⁽¹⁾	Package Type	Package Drawing	Pins	Package Qty	e Eco Plan ⁽²⁾	Lead/Ball Finish	MSL Peak Temp ⁽³⁾
5962-87681012A	ACTIVE	LCCC	FK	20	1	TBD	POST-PLATE	N / A for Pkg Type
5962-8768101EA	ACTIVE	CDIP	J	16	1	TBD	A42	N / A for Pkg Type
5962-8768101QFA	ACTIVE	CFP	W	16	1	TBD	A42	N / A for Pkg Type
UC1825J	ACTIVE	CDIP	J	16	1	TBD	A42	N / A for Pkg Type
UC1825J883B	ACTIVE	CDIP	J	16	1	TBD	A42	N / A for Pkg Type
UC1825L	ACTIVE	LCCC	FK	20	1	TBD	POST-PLATE	N / A for Pkg Type
UC1825L883B	ACTIVE	LCCC	FK	20	1	TBD	POST-PLATE	N / A for Pkg Type
UC1825W883B	ACTIVE	CFP	W	16	1	TBD	A42	N / A for Pkg Type
UC2825DW	ACTIVE	SOIC	DW	16	40	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
UC2825DW/1	PREVIEW	SOIC	DW	16		Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
UC2825DW/1G4	PREVIEW	SOIC	DW	16		Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
UC2825DWG4	ACTIVE	SOIC	DW	16	40	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
UC2825DWTR	ACTIVE	SOIC	DW	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
UC2825DWTRG4	ACTIVE	SOIC	DW	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
UC2825J	ACTIVE	CDIP	J	16	1	TBD	A42	N / A for Pkg Type
UC2825N	ACTIVE	PDIP	Ν	16	25	Green (RoHS & no Sb/Br)	CU NIPDAU	N / A for Pkg Type
UC2825NG4	ACTIVE	PDIP	N	16	25	Green (RoHS & no Sb/Br)	CU NIPDAU	N / A for Pkg Type
UC2825Q	ACTIVE	PLCC	FN	20	46	Green (RoHS & no Sb/Br)	CU SN	Level-2-260C-1 YEAR
UC2825QG3	ACTIVE	PLCC	FN	20	46	Green (RoHS & no Sb/Br)	CU SN	Level-2-260C-1 YEAR
UC2825QTR	ACTIVE	PLCC	FN	20	1000	Green (RoHS & no Sb/Br)	CU SN	Level-2-260C-1 YEAR
UC2825QTRG3	ACTIVE	PLCC	FN	20	1000	Green (RoHS & no Sb/Br)	CU SN	Level-2-260C-1 YEAR
UC3825DW	ACTIVE	SOIC	DW	16	40	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
UC3825DWG4	ACTIVE	SOIC	DW	16	40	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
UC3825DWTR	ACTIVE	SOIC	DW	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
UC3825DWTRG4	ACTIVE	SOIC	DW	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR
UC3825J	ACTIVE	CDIP	J	16	1	TBD	A42	N / A for Pkg Type
UC3825N	ACTIVE	PDIP	Ν	16	25	Green (RoHS & no Sb/Br)	CU NIPDAU	N / A for Pkg Type
UC3825NG4	ACTIVE	PDIP	Ν	16	25	Green (RoHS & no Sb/Br)	CU NIPDAU	N / A for Pkg Type
UC3825Q	ACTIVE	PLCC	FN	20	46	Green (RoHS & no Sb/Br)	CU SN	Level-2-260C-1 YEAR

29-Oct-2009

Orderable Device	Status ⁽¹⁾	Package Type	Package Drawing	Pins P	ackage Qty	Eco Plan ⁽²⁾	Lead/Ball Finish	MSL Peak Temp ⁽³⁾
UC3825QG3	ACTIVE	PLCC	FN	20	46	Green (RoHS & no Sb/Br)	CU SN	Level-2-260C-1 YEAR
UC3825QTR	ACTIVE	PLCC	FN	20	1000	Green (RoHS & no Sb/Br)	CU SN	Level-2-260C-1 YEAR
UC3825QTRG3	ACTIVE	PLCC	FN	20	1000	Green (RoHS & no Sb/Br)	CU SN	Level-2-260C-1 YEAR

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details. **TBD:** The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

⁽³⁾ MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer:The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF UC1825, UC2825, UC2825M, UC3825M, UC3825M :

• Space: UC1825-SP

NOTE: Qualified Version Definitions:

• Space - Radiation tolerant, ceramic packaging and qualified for use in Space-based application

TAPE AND REEL INFORMATION





QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal												
Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
UC2825DWTR	SOIC	DW	16	2000	330.0	16.4	10.85	10.8	2.7	12.0	16.0	Q1
UC2825QTR	PLCC	FN	20	1000	330.0	16.4	10.3	10.3	4.9	12.0	16.0	Q1
UC3825DWTR	SOIC	DW	16	2000	330.0	16.4	10.85	10.8	2.7	12.0	16.0	Q1
UC3825QTR	PLCC	FN	20	1000	330.0	16.4	10.3	10.3	4.9	12.0	16.0	Q1



PACKAGE MATERIALS INFORMATION

6-Oct-2008



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
UC2825DWTR	SOIC	DW	16	2000	346.0	346.0	33.0
UC2825QTR	PLCC	FN	20	1000	346.0	346.0	33.0
UC3825DWTR	SOIC	DW	16	2000	346.0	346.0	33.0
UC3825QTR	PLCC	FN	20	1000	346.0	346.0	33.0

J (R-GDIP-T**) 14 LEADS SHOWN

CERAMIC DUAL IN-LINE PACKAGE



NOTES: A. All linear dimensions are in inches (millimeters).

- B. This drawing is subject to change without notice.
- C. This package is hermetically sealed with a ceramic lid using glass frit.
- D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
- E. Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

W (R-GDFP-F16)

CERAMIC DUAL FLATPACK



- A. All linear dimensions are in inches (millimeters).
 - B. This drawing is subject to change without notice.
 - C. This package can be hermetically sealed with a ceramic lid using glass frit.
 - D. Index point is provided on cap for terminal identification only.
 - E. Falls within MIL STD 1835 GDFP1-F16 and JEDEC MO-092AC



LEADLESS CERAMIC CHIP CARRIER

FK (S-CQCC-N**) 28 TERMINAL SHOWN



NOTES: A. All linear dimensions are in inches (millimeters).

B. This drawing is subject to change without notice.

- C. This package can be hermetically sealed with a metal lid.
- D. Falls within JEDEC MS-004



N (R-PDIP-T**)

PLASTIC DUAL-IN-LINE PACKAGE

16 PINS SHOWN



NOTES:

- A. All linear dimensions are in inches (millimeters).B. This drawing is subject to change without notice.
- Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
- \triangle The 20 pin end lead shoulder width is a vendor option, either half or full width.



MECHANICAL DATA

MPLC004A - OCTOBER 1994

PLASTIC J-LEADED CHIP CARRIER

FN (S-PQCC-J**)



NOTES: A. All linear dimensions are in inches (millimeters).

B. This drawing is subject to change without notice.

C. Falls within JEDEC MS-018



DW (R-PDSO-G16)

PLASTIC SMALL OUTLINE



NOTES: A. All linear dimensions are in inches (millimeters). Dimensioning and tolerancing per ASME Y14.5M-1994.


B. This drawing is subject to change without notice.

C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).

D. Falls within JEDEC MS-013 variation AA.



LAND PATTERN DATA

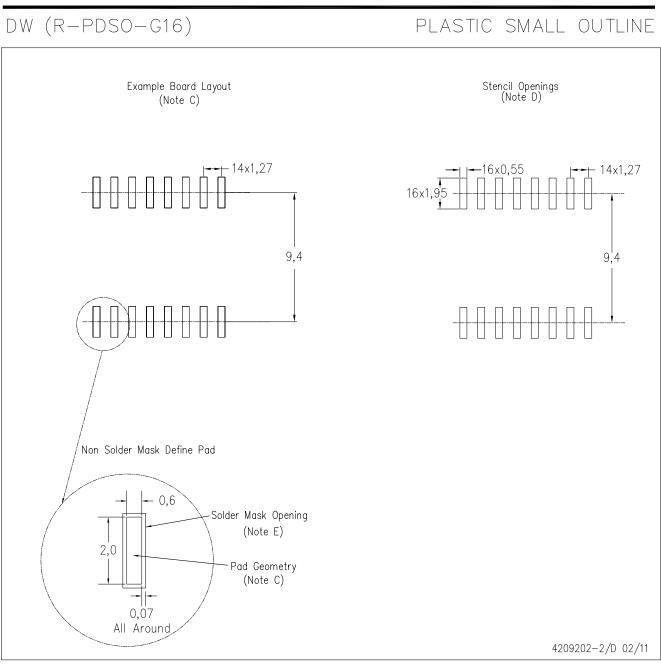

NOTES:

A. All linear dimensions are in millimeters.

- B. This drawing is subject to change without notice.
- C. Refer to IPC7351 for alternate board design.
- D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525
- E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.



IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		Applications	
Audio	www.ti.com/audio	Communications and Telecom	www.ti.com/communications
Amplifiers	amplifier.ti.com	Computers and Peripherals	www.ti.com/computers
Data Converters	dataconverter.ti.com	Consumer Electronics	www.ti.com/consumer-apps
DLP® Products	www.dlp.com	Energy and Lighting	www.ti.com/energy
DSP	dsp.ti.com	Industrial	www.ti.com/industrial
Clocks and Timers	www.ti.com/clocks	Medical	www.ti.com/medical
Interface	interface.ti.com	Security	www.ti.com/security
Logic	logic.ti.com	Space, Avionics and Defense	www.ti.com/space-avionics-defense
Power Mgmt	power.ti.com	Transportation and Automotive	www.ti.com/automotive
Microcontrollers	microcontroller.ti.com	Video and Imaging	www.ti.com/video
RFID	www.ti-rfid.com	Wireless	www.ti.com/wireless-apps
RF/IF and ZigBee® Solutions	www.ti.com/lprf		

TI E2E Community Home Page

e2e.ti.com

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2011, Texas Instruments Incorporated